


# NATURAL PAVING PATH GRADE

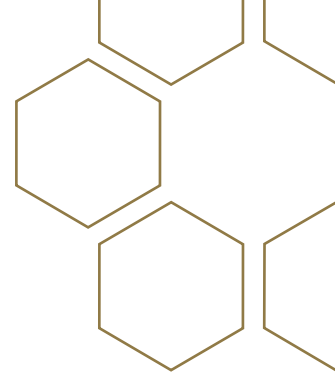

<b>TECHNICAL DATA SHEET</b>	G 123 001
<b>ISSUE NUMBER</b>	01
<b>DATE</b>	MARCH 2020

## TECHNICAL SPECIFICATIONS

### GENERAL

Material	100% recycled or pure Polypropylene (recyclable)
Manufacturing technique	High Precision Injection Moulding
Manufacturing standards	ISO9001, 16949 Lloyds, REACH
Manufacturing location	Europe
Colour	Cream or Black
Cell structure	Hexagonal
Membrane	Geotextile 30 g/m <sup>2</sup>
UV and frost	UV and frost resistant

### PHYSICAL DATA

Sheet size L x W x H	1176 x 765 x 26 mm (0.9 m <sup>2</sup> )
Cell size	42 mm diameter
Wall thickness tapered	0.8–1.3 mm (top – bottom)
Weight per m <sup>2</sup>	1.19 kg
Gravel volume or weight	43 litre or 65 kg gravel size 3-12 mm
Vertical strength, empty	>60 t/m <sup>2</sup>
Vertical strength, filled	depending on gravel 150–250 t/m <sup>2</sup>

#### DISCLAIMER

The information provided in this publication is correct to the best knowledge of the company and is given out in good faith. The information presented herein is intended only as a general guide to the use of such products and no liability is accepted by Cirtex Industries Ltd for any loss or damage however arising, which results either directly or indirectly from the use of such information. Cirtex Industries Ltd has a policy of continuous development so information and product specifications may change without notice.